

## Quick Installation Guide

### AC750 Wireless Dual Band Gigabit Router


Suitable for: A1004

V1.15.03

Copyrights © 2015 by TOTOLINK All rights reserved. Website: <http://www.totolink.net>  
Information in this document is subject to change without prior notice.

# 1 Hardware Installation

If you access Internet by ADSL, please comply with step 1, 2, 3 and 4 in below diagram in correct order; if you access Internet by residential broadband, please comply with step 2, 3 and 4 to connect the WAN port of your router with the residential broadband directly.

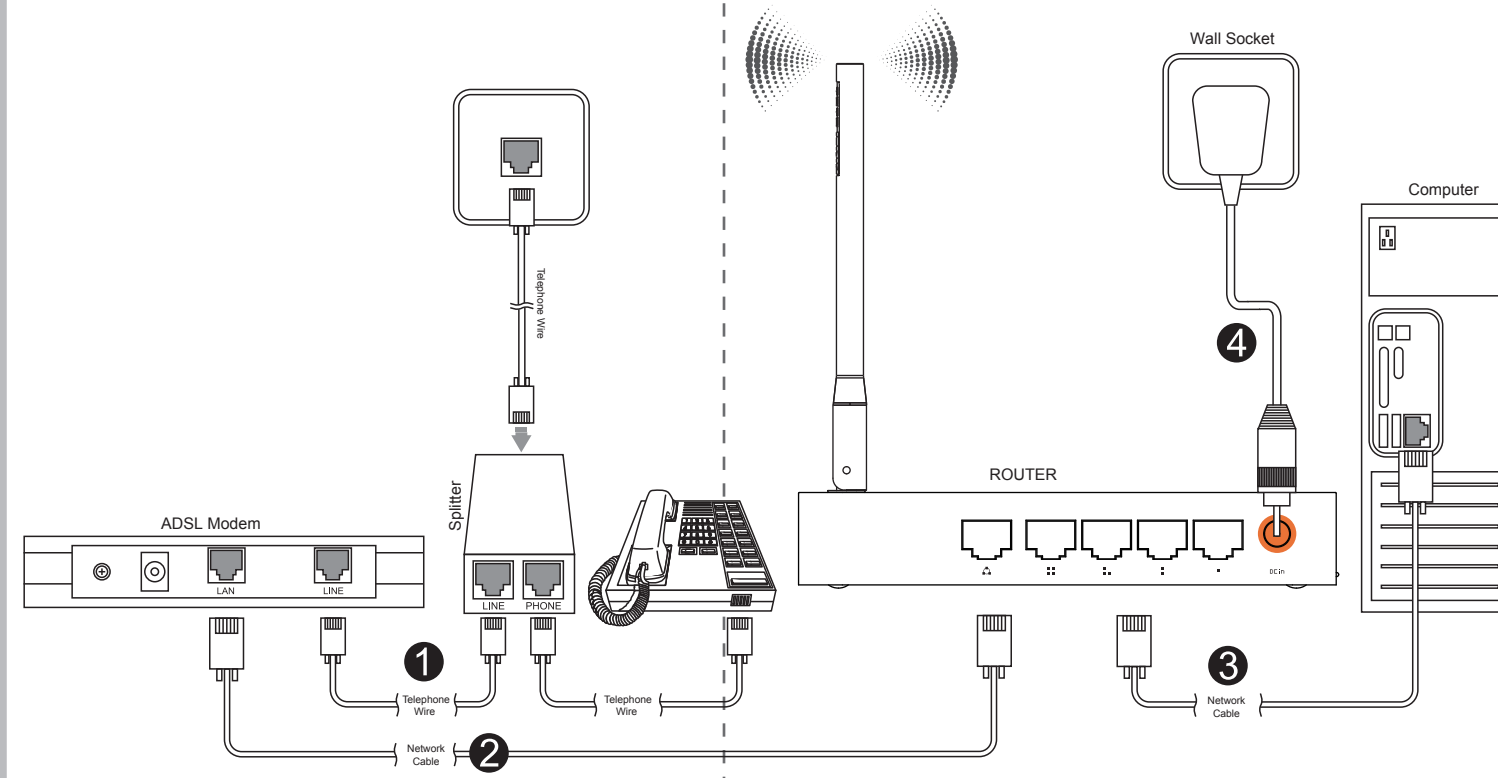

After connected, please check whether the LED indicators are normal.

Name	Description
Power	This indicator lights blue while the router receiving power, otherwise it is off.
CPU	This indicator lights blue after the router powered on.
2.4G	This indicator lights blue when the router's 2.4G wireless enabled.
5G	This indicator lights blue when the router's 5G wireless enabled.
WAN	When the WAN port is connected successfully the indicator lights blue. While transmitting or receiving data through the WAN port the indicator blinks blue.
1/2/3/4 LAN	When one of the LAN ports has a successful connection, the corresponding indicator lights blue. While transmitting or receiving data through the LAN port the indicator blinks blue.

### NOTE:

1. Please disconnect the power adapter and all cables during thunderstorm weather;
2. Keep away from heat source and keep well ventilated;
3. Please pay attention to the waterproofing and moisture-proof when storing, transporting and running;
4. The power supply must reach the rated current and power;
5. Put the router in flat places.

# 2 Set Up PC

**Windows Vista/7** For Windows Vista or Windows 7 Operating System, please comply with following steps to set up.

1. Click "Start—Control Panel—Network and Internet—Network Connection", right-click "Local Area Connection", and choose "Properties".
2. Double-click "Internet Protocol Version 4 (TCP/IPV4)".
3. Choose "Obtain an IP address automatically" and "Obtain DNS server address automatically", click "OK", go back to previous interface and click "OK".

**Windows 8** For Windows 8 Operating System, please comply with following steps to set up.

1. Click "Start—Control Panel—Network and Sharing Center—Change adapter setting", right-click "Ethernet", and choose "Properties".
2. Double-click "Internet Protocol Version 4 (TCP/IPV4)".
3. Choose "Obtain an IP address automatically" and "Obtain DNS server address automatically", click "OK", and then click "OK".

# 3 Set Up Router

Please set up the router following below steps.

1. Run the Web browser.
2. Type 192.168.1.1 in the Web Browser address bar, then press Enter key.
3. It will show up the following page, please click Internet Wizard icon.
4. Enter valid User Name and Password (The default User name and Password are "admin"). Then click "OK" button or press Enter.
5. Two options provided, "Automatic Internet configuration" is recommended, click Next.
6. The router will detect whether the physical connection of internet (WAN) port is OK. Click Next.
7. Wait for a while, PPPoE is detected, type in your User ID and Password. Then click Next.
8. Click Save and Close to make settings work.
9. After Internet wizard, please click the Wireless Wizard icon to start wireless settings. Click Next.
10. Choose your country region and click Next.

# 4 Wireless Network Connection

1. Right-click "My Network Places", click "Properties".
2. Right-click "Wireless Network Connection", and click "View Available Wireless Networks".
3. Confirm the wireless network SSID name, choose one that you would like to connect, then click "Connect".
4. Input the encryption key and click "Connect".
5. Have connected wireless network, you can access Internet through wireless mode.
11. Click Check SSID to avoid SSID conflict, then click Next when it shows "This SSID is available".
12. Choose the best channel, and click Next.
13. Click Next to go on the settings.
14. Setup the encryption for your WiFi network, keep the default option. Click Next.
15. Select TKIP or AES cryptography, and then click Next.
16. Input the password (more than 8 characters).
17. Click "Apply and Set 5GHz Wireless Network" button to confirm the settings.
18. 5GHz wireless network wizard is similar with the settings of 2.4GHz, please refer to the process of 2.4GHz wireless settings.